

# ZONE WIRELESS 2 ES

Setup Guide

Setup Guide




logitech®

**CONTENTS**


English . . . . .	3	Español. . . . .	31
Français . . . . .	17	Português . . . . .	45

KNOW YOUR PRODUCT

BACK VIEW

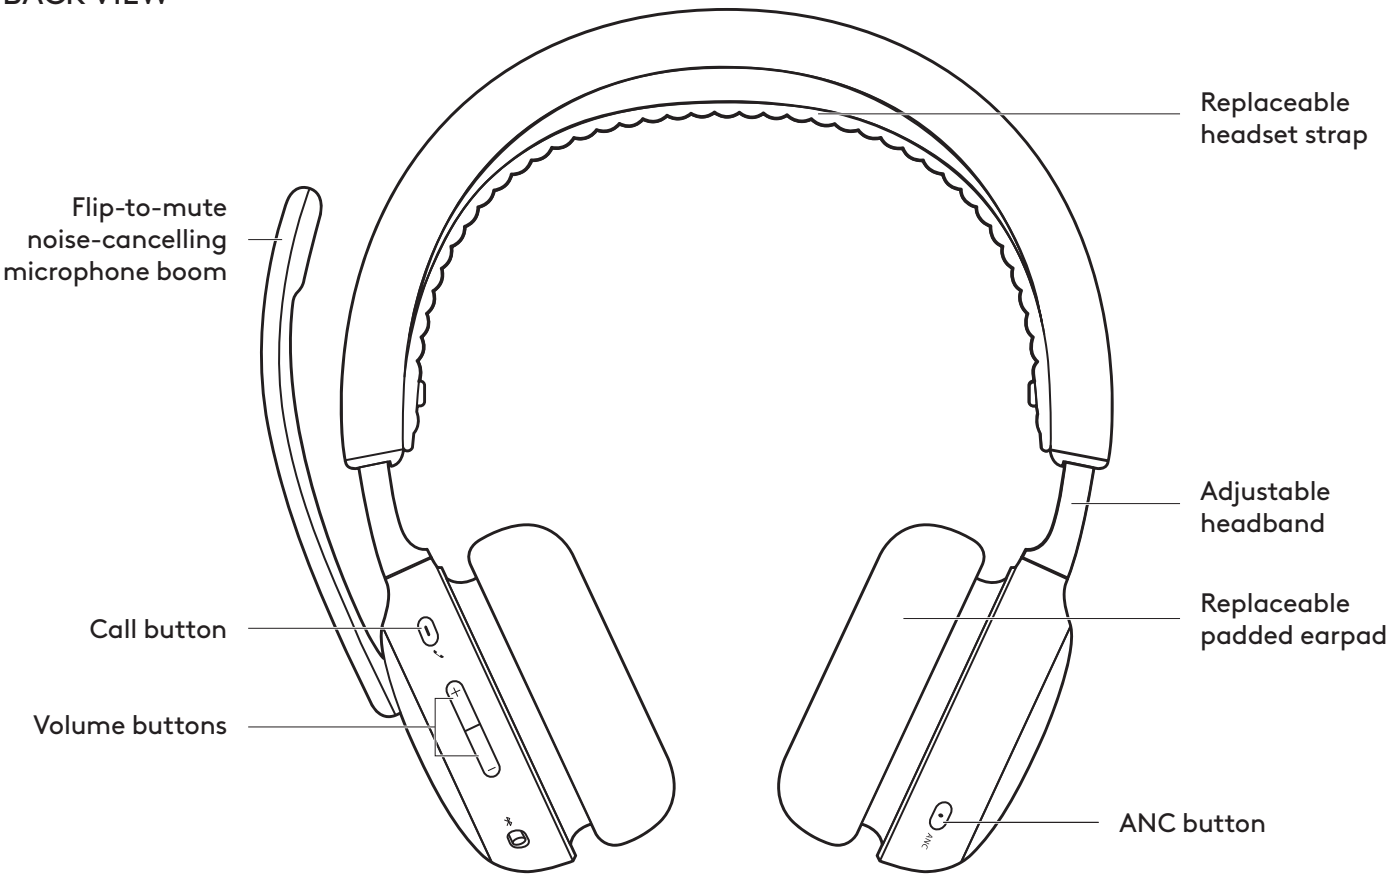


BOTTOM VIEW

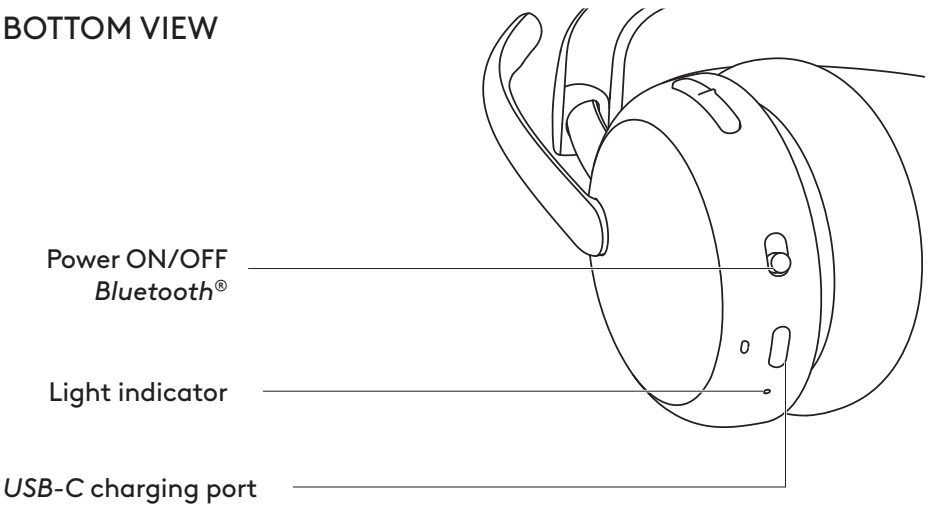


## WHAT'S IN THE BOX

1. Headset
2. USB-C to C charging cable
3. Travel bag
4. User documentation

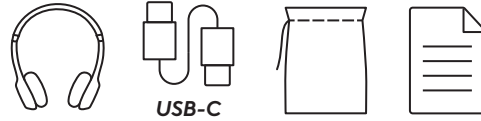

## POWER ON AND OFF

1. Slide power switch to the center.
2. Once powered on, the light indicator turns white.
3. To power off, slide power switch to the power icon.

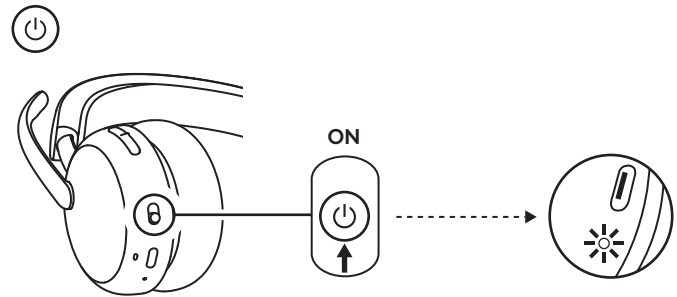


## PAIRING VIA BLUETOOTH®

1. Slide power switch to the *Bluetooth®* icon and hold for 2 seconds. The light indicator will flash white rapidly.
2. Open *Bluetooth®* settings on your device.
3. Select "Logi Zone Wireless 2 ES" in discoverable devices.
4. Once successfully paired, the light indicator will turn solid white.


### Tip (when using Windows 10 only):

When the headset is paired to the laptop, if needed, go to the sound setting and select "Logi Zone Wireless 2 ES Stereo" for the best music quality and select "Logi Zone Wireless 2 ES Hands-Free" for calls.

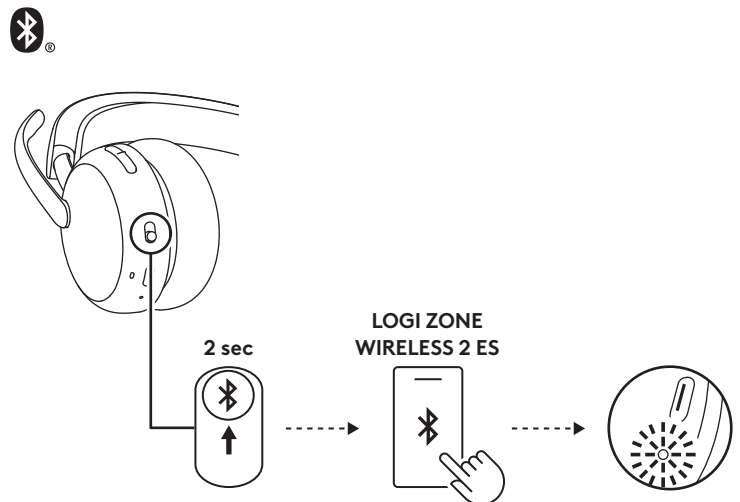


## ADJUSTING HEADSET

1. Adjust the headset by sliding earcups up and down the headband.
2. Swivel earcups to fit on your ear.
3. It may be easier to adjust the headset on your head. Move the earcups up and down the headband until they sit comfortably on your ears.

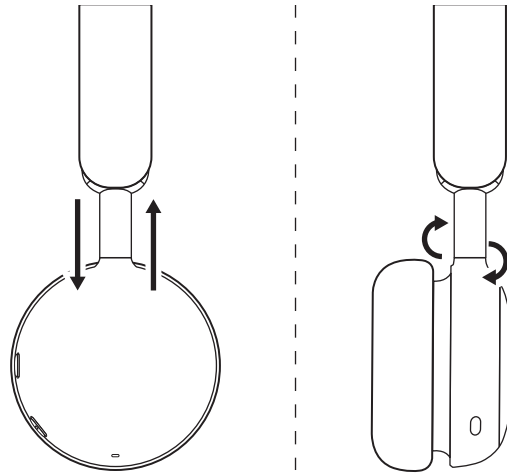

## ADJUSTING THE MICROPHONE BOOM

The microphone boom rotates 270 degrees. Wear it on either the left or right side. The audio channel will switch automatically, depending on the direction you are wearing the microphone.

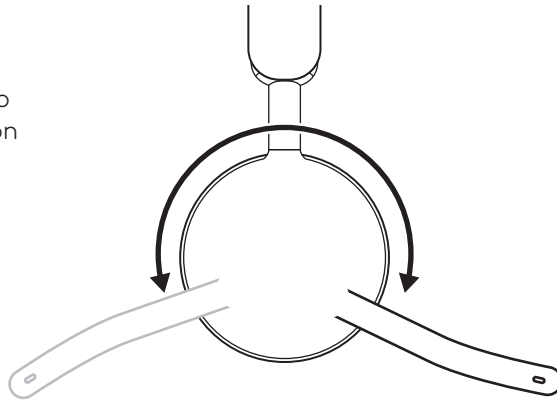

Mic boom should be placed close or next to your mouth, aligned with the corner of the mouth.



## CHARGING

The headset automatically powers off when left idle.


Sleep timer can be changed in Logi Tune app.

The headset indicator light will turn RED when the battery is low.






### CHARGING VIA USB CABLE

1. Plug one end of the cable to the *USB-C* port on the bottom of the earcup and the other end into the *USB-C* charging port on your computer, dock, or a power adapter.
2. Indicator light will be a breathing white light for charging.
3. Indicator light will be solid white when fully charged.
  - 2 hours of charging fully charges the battery.
  - 5 minutes will give you up to 1 hour of talk time.\*
4. The headset can be used with *Bluetooth*® paired while charging. It can also be used as a corded headset with the *USB-C* cable connected while the headset is powered off.

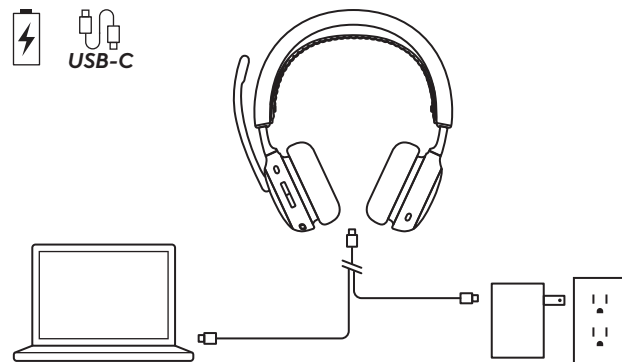\* Battery life may vary based on environmental and computing conditions.



## HEADSET CONTROLS

Button	Usage		Action
	<b>Call controls</b>	Answer / End call	Short press
		Resume on-hold call	
	<b>Voice assistance</b>	Reject call	2 seconds press
		Trigger voice assistant (when there is no call activity)	
	<b>ANC controls</b>	Toggle between ANC and Transparency On	Short press
		ANC off	2 seconds press
	<b>Media controls (Enable with Logi Tune)</b>	Play / Pause	Short press
		Next track	Double press
		Previous track	Triple press
	<b>Volume controls</b>	Volume up	Short press up
		Volume down	Short press down
	<b>Mute</b>	Mute on	Mic boom flip up
		Mute off	Mic boom flip down

### Note:

- Media control functionality depends on the type of application. It can only be set up through the Logi Tune app.
- Call activities are always the first priority over media streaming. When two *Bluetooth®* devices are connected, the last active device will take a priority over the other. And the priority between two *Bluetooth®* devices can be customized on Logi Tune app under Connected devices.
- Voice prompts indicate when the mic is mute on/off.


**Tip:** ANC can be customized on Logi Tune app.

ACTIVE NOISE CANCELLATION (ANC)

ANC blocks out the noise around you to help you concentrate on the task at hand.


- Press the ANC button on the side of the earcup to toggle between ANC and Transparency mode.
- There will be voice prompts when switching between modes.

**Note:** ANC button can be customized to cycle through up to 5 different modes on Logi Tune app: Adaptive ANC, ANC high/low/off, Transparency.

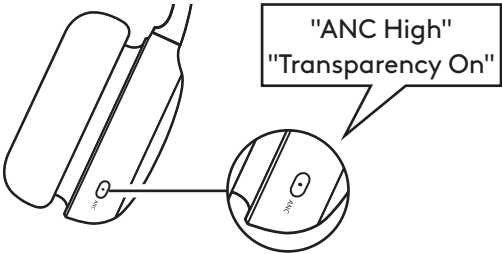

HEADSET LIGHT INDICATOR

Light		Status
White	Solid	Power on
		Connected to a device
		Battery fully charged
	Pulsing	Battery charging
	Flashing	Incoming call
		Bluetooth® pairing mode
Red	Blinking	Low battery
	Solid	Mute on
Purple and White	Blinking	Headset firmware updating

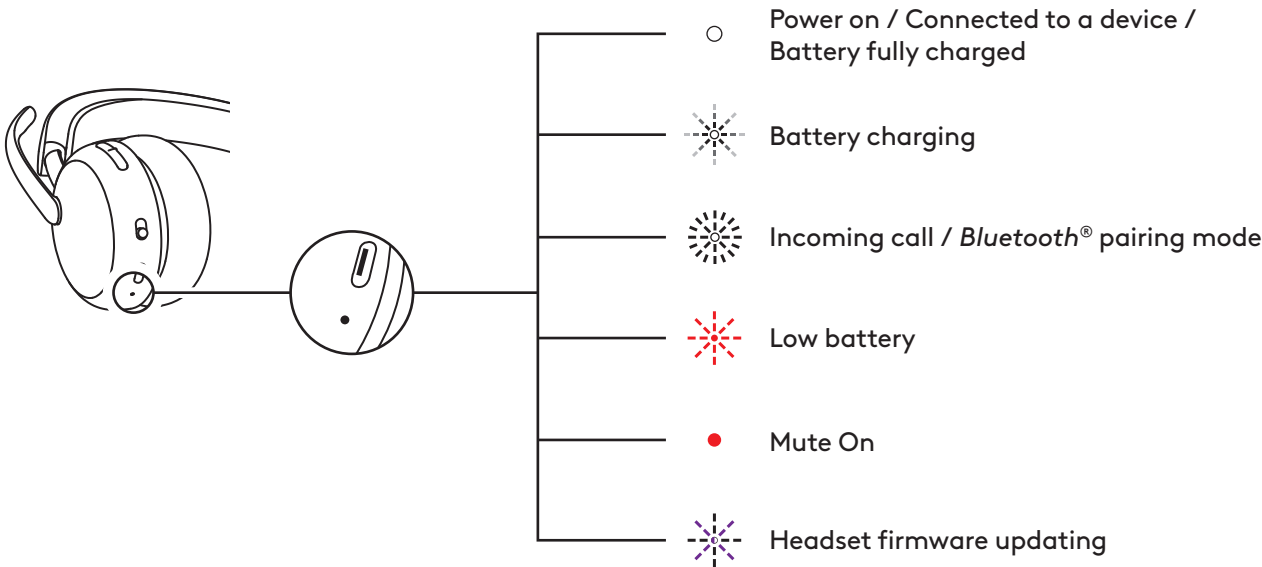




## AUDIO OVER USB (DENSITY-FRIENDLY)

If your audio is unstable during a call because there are too many wireless devices nearby (high density), the headset can be used as a corded headset.

1. Turn off the headset.
2. Connect the headset to the USB cable provided. And plug the other side of the *USB-C* cable into the *USB-C* port on your computer.
3. Make sure "Logi Zone Wireless 2 ES-USB" is selected on the audio device setting.

**Note:** The headset charges during this mode. Button controls may not be available in this mode.

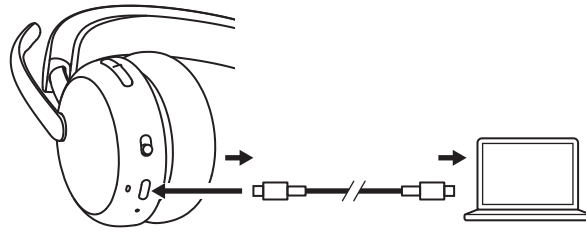

## LOGI TUNE

Logi Tune helps boost your headset performance with periodic software and firmware updates. Learn more and download Logi Tune at [logitech.com/tune](https://logitech.com/tune), the *Apple App Store* or *Google Play* store.



## ADJUSTING SIDETONE

**Sidetone** lets you hear your own voice during conversations so you are aware of how loud you are talking. In Logi Tune app, select the sidetone feature, and adjust the dial accordingly.

- A higher number means you hear more external sound.
- A lower number means you hear less external sound.

## AUTO SLEEP TIMER

By default, your headset will automatically power off when not in use for 30 mins. Adjust the sleep timer in the Logi Tune app.

## MIC EQ

Customize Mic EQ in Logi Tune to adjust your voice to sound brighter or deeper.

## HEARING PROTECTION

Zone Wireless 2 ES provides three types of protection to help you hear safely.

**Peak limiting:** Audio volume is always limited at 100dBA to prevent hearing damages.

**Anti-startle protection:** It eliminates sudden audio spikes to avoid acoustic shocks as per Australian G616 guideline. This can be enabled on the Logi Tune app and applies to call activities only.

**Noise exposure over time:** It protects your ears from the noise exposure over an 8-hour period with a limit up to 85dBA as per Australian G616 guideline. This can be enabled on the Logi Tune app and applies to call activities only.

## UPDATE YOUR HEADSET

Download Logi Tune from [logitech.com/tune](https://logitech.com/tune) and check for available firmware updates.

**Note:** Turn off and on the headset after the update is completed to make sure it is successfully done.

## RESET YOUR HEADSET

To reset your headset back to its original state, power headset on, long press the volume up button and slide power button to the pairing mode for 5 seconds. The headset is successfully reset when the headset light indicator blinks fast in red and white 3 times and turns off.

You may also conduct factory reset on Logi Tune:

1. Select your headset under the "Devices" list.
2. Click on the (i) button on the right.
3. Click "Factory reset" , then select "Proceed to factory reset" to restore factory settings.

## DIMENSIONS

### Headset:

Height x Width x Depth:  
185.2 x 183.6 x 73.0 mm

### Weight:

212 g

## SYSTEM REQUIREMENTS

Works with common calling applications across almost all platforms and operating systems via *Bluetooth*® and *iOS* or *Android Bluetooth*® enabled devices.

## TECHNICAL SPECIFICATIONS

Microphone type: 2 noise-canceling mics with AI-based algorithms and Mic EQ

Frequency response (headset): 20 Hz - 20 kHz (music mode), 100 Hz - 8 kHz (talk mode)

Frequency response (microphone): 100 Hz - 8 kHz

Battery type: Built-in battery (lithium ion)

Battery life (talk time)\*: Up to 20 hrs (ANC on), up to 25 hrs (ANC off)

Battery life (listening time)\*: Up to 25 hrs (ANC on), up to 48 hrs (ANC off)

*Bluetooth*® version: 5.3

Wireless range\*: Up to 50 m/170 ft (open field line of sight)

*USB-C* to *C* charging cable length: 1.5 m

Audio compliance: EN 50332-2 compliant

\* Battery life and wireless range may vary based on environmental and computing conditions.

[www.logitech.com/support/zonewireless2es](http://www.logitech.com/support/zonewireless2es)